



(KD) 304/316 砧口腰仁不銹鋼避震軟喉 S.S. Union Type Flexible Shock-Absorbing Hose

本款不銹鋼避震軟管專為設備活動部件之對位連接設計，能有效補償管道位移、管道振動與地基沉降產生的影響，適用於帶壓狀態下的液體、氣體及蒸汽

Flexible metal hose used for alignment and connecting of moving parts of equipment. Absorption of pipe strain, vibration and ground sinking. Suitable for liquids, gases and steams under pressure.




產品特點 Features

- 採用柔韌耐用的不銹鋼波紋管體
Flexible and durable stainless steel hose
- 具備優異的耐候性能
Weather resistant construction
- 大幅提升抗疲勞使用壽命
Significantly improved fatigue life

DN	L = 總長Overall Length (mm)	橫向位移量 Lateral Movement (mm)
15	200/250/300	45
20		40
25		35
32		28
40		25
50		20

技術參數 Technical Specification

- 最高使用溫度(淡水介質) Maximum Temperature (freshwater) : 220°C
- 最大工作壓力 Maximum Working Pressure: 16 Bar
- 連接方式 Connection: 砧口螺紋接頭 BSPT Union Joint
- 長度公差 Length ± 5 mm

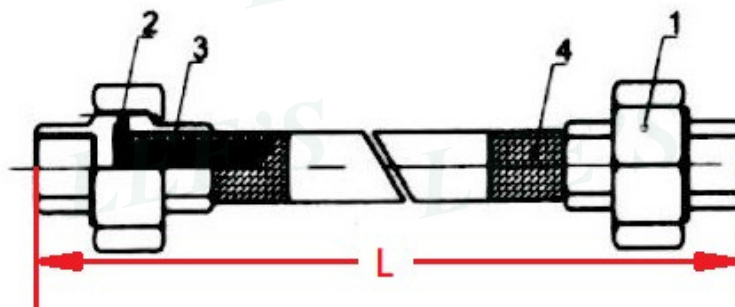

	部件名稱 Part Name	材質 Material
1	腰仁 Union	304/316 不銹鋼 Stainless Steel
2	墊片 Gasket	纖維 Fiber
3	軟管 Flexible Tube	304/316 不銹鋼 Stainless Steel
4	編織網 Braid	304/316 不銹鋼 Stainless Steel